

## PRODUCT DATASHEET

## **GRP and Aluminium Termination Bar**

RynoTrim's high quality, durable termination bars are a neat and efficient means of terminating roofing and waterproofing membranes at wall abutments.

GRP termination bar is manufactured from pultruded glass fibre reinforced polyester. It is UV protected and has a negligible coefficient of thermal expansion. It is available from stock in black, white or grey.

Aluminium termination bar is manufactured from aluminium alloy BS 1474, Quality 6063/T6 (AIMgSi 0.5 F22). It is available from stock in mill finish.

Both are available in further colours to special order.



### **KEY FEATURES**

- Economical alternative to traditional lead flashing, eliminating the need to cut chases
- Neat unobtrusive appearance
- Choice of GRP or aluminium
- Suitable for all waterproofing types
- Fix through or cover flashing type available
- Simple to handle, work and install
- Full range of fixings and mastic sealants available
- Maintenance free

## **PERFOMANCE**

GRP and aluminium termination bars will not rust and are not affected by atmospheric pollution. They are colourfast and once installed are maintenance free.

## **SUPPLY**

GRP and aluminium termination bars are supplied in 3m lengths. There are 30 lengths per carton.



Castlepoint Castle Way Ellon AB41 9RG

01358 726000 sales@rynogroup.co.uk rynogroup.co.uk




## PRODUCT DATASHEET

# GRP and Aluminium Termination Bar


## **SITEWORK**

GRP and aluminium termination bars should be fixed at maximum 300mm centres, using suitable fixings. A comprehensive range of fixings and drill bits is available from stock.

#### **GRP Termination Bar**

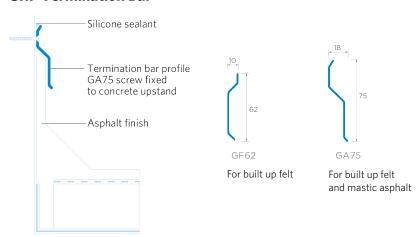

#### **Aluminium Termination Bar**

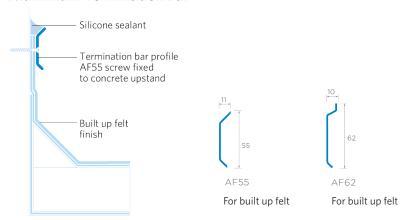

Fixings and Sealant Ryno offers a range of fixings and sealant to complement the Trim and Termination Bar ranges.





Castlepoint Castle Way Ellon AB41 9RG

01358 726000 sales@rynogroup.co.uk rynogroup.co.uk