

RS


# Aluminium Primary Joist Support Rail



## Overview

Provides a totally stable platform for top rail and binds system together into a lattice format. Joist available in multiple depths to suit various height build-ups.

- Allows the whole system to be bound together into a lattice format
- Available in multiple depths to suit various height build-up

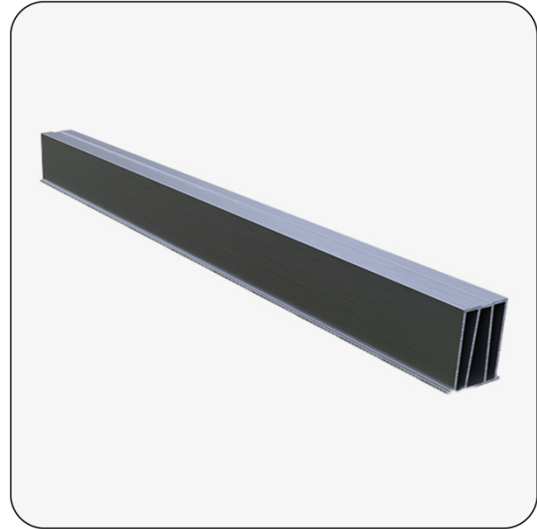

## Performance

<b>Allowable load</b>	Uniformly distributed >4.0kN/m <sup>2</sup> , Concentrated 2kN
<b>Aluminium grade</b>	6063 T6
<b>Biological/Chemical</b>	Resistant to moulds algae, alkali, bitumen, UV
<b>Reaction to fire</b>	A1

## Dimensions and Spans

Code	Dimensions	Span
RS25	48x25mm	600mm
RS60	48x60mm	1200mm

## Compatible Systems

**TerraSmart®**

Rail Paving System

Premium, versatile paving system for waterproofed substrates, **where non-combustibility isn't required**

Visit [www.rynogroup.co.uk](http://www.rynogroup.co.uk) or call us today on **+44 (0)203 967 3500** or reach out on [sales@rynogroup.co.uk](mailto:sales@rynogroup.co.uk).