

Vertical Paving Closure




Patent Application:
GB2115912.4

Overview

The vertical closure is fixed to the top rail and sits flush with the paving slab edge to create a uniform enclosure for steps or the vertical face of a paved area. The aluminium vertical closure profile locks the upright paving tile in place.

- 30 years warranty and 60 years design life
- Compatible with both edge variations of rail system
- Slip-resistant powder coated finish to match tile colour, providing a continuous, safe aesthetic trim
- Easy to install
- Secures vertical paver firmly in place

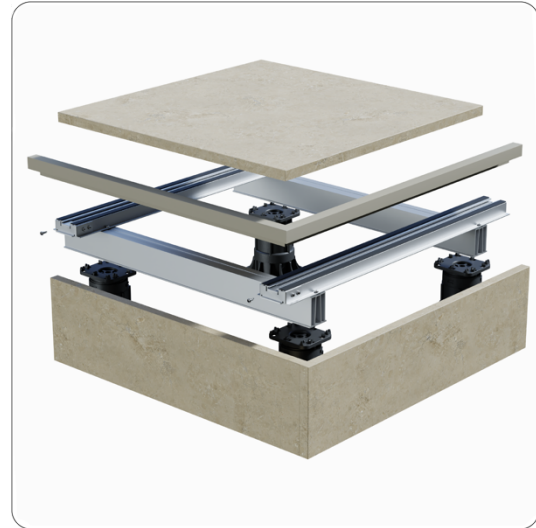

Performance

Material	Aluminium alloy 6063 T6
Coating / Finish	Profile – Powder coated to any Standard RAL colour with textured coating (brackets are not coated)
Reaction to fire	A2-s1, d0
Dimensions	Visible profile face dimensions – 24mm top and side
Weight	Profile – 0.4Kg per metre

Accessories



Mounting Bracket


Attached to the RST on the edges to secure pavers in place and minimise movement



Joist screw

4.2 x 13mm stainless steel A2, square drive pan-head, self-drilling

Compatible Systems



TerraSmart®
Rail Paving System

Premium, versatile paving system
for waterproofed substrates

TerraSmart®
Rail Paving System

Premium, versatile paving system
for waterproofed substrates, **where
non-combustibility isn't required**

Got questions?

Visit www.rynogroup.co.uk or call us today on **+44 (0)203 967 3500** or reach out on sales@rynogroup.co.uk.