

Natural Stone Look Liddio Porcelain Paving




Designs



Please note: Colour shades may differ between batches. If you need a specific batch to match a previous order for a project, please inform us when placing your order, although availability can't be guaranteed.

Dimensions & Packing Details

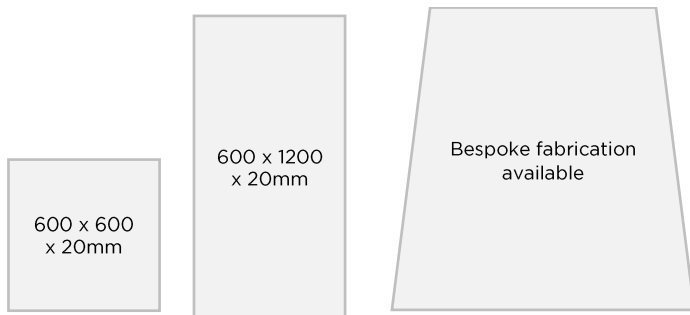

Weight: 44.8kg/m²

Packing Details

Nominal Size	Working Size	Pieces X Box	Sqm X Box	Boxes X Pallet	Kg X Box	Sqm X Pallet
600x600	595x595	2	0.72	30	33	21.6
600x1200	595x1195	1	0.72	35	33.35	25.2

Regularity Characteristics

Technical Features	Norms	Required Standard	Performance Value
Length and width	ISO 10545-2	$\pm 0.6\%$ or $\pm 2\text{mm}$ (*)	$\pm 0.3\%$ / $\pm 1\text{mm}$ (*)
Thickness		$\pm 5\%$ / 0.5mm (**)	$\pm 5\%$ / 0.5mm (**)
Straightness of sides		$\pm 0.5\%$ / $\pm 1.5\text{mm}$ (***)	$\pm 0.3\%$ / 0.8mm (***)
Rectangularity (Measurement only on short edges when $L/l \geq 3$)		$\pm 0.5\%$ / $\pm 2\text{mm}$ (****)	$\pm 0.3\%$ / $\pm 1.5\text{mm}$
Surface flatness		c.c. $\pm 0.5\%$ / 2mm e.c. $\pm 0.5\%$ / 2mm w. $\pm 0.5\%$ / 2mm	Not applicable to "strong" structures

Structural Characteristics

Technical features	Norms	Required Standard	Performance Value
Water absorption level (in% by mass)	ISO 10545-3	$E \leq 0,5\%$ Individual Maximum $0,6\%$	$\leq 0,1\%$
	ASTM C373-18	Requirement ANSI A137.1-2017 Water Absorption Max $< 0,5\%$	$\leq 0,5\%$

Bulk Mechanical Characteristics

Technical features	Norms	Required Standard	Performance Value
Breaking strength	ISO 10545-4	$S \geq 1300\text{ N}$	$S \geq 10000\text{ N}$
Modulus of rupture		$R \geq 35\text{ N/mm}^2$	$R \geq 45\text{ N/mm}^2$
Bending and breaking load resistance (4)(5)	EN 1339 Annex F	-	For specific values check the table below named "Physical-mechanical features in accordance with EN 1339"
Impact resistance, as coefficient of restitution	ISO 10545-5	Declared value	$\geq 0,55$
Repeated Shock Test (Installation on pedestals)	QB UPEC F+	No breakage permitted	Compliant

Surface Mechanical Characteristics

Technical features	Norms	Required Standard	Performance Value
Impact resistance, as coefficient of restitution	ISO 10545-6	$\leq 175\text{ mm}^3$	$\leq 150\text{mm}^3$

Thermal and Hygrometric Characteristics

Technical features	Norms	Required Standard	Performance Value
Coefficient of linear thermal expansion	ISO 10545-8	Declared value	$\leq 7\text{MK}^{-1}$
Thermal shock resistance	ISO 10545-9	Test passed in accordance with ISO 10545-1	Resistant
Moisture expansion (in mm/m)	ISO 10545-10	Declared value	$\leq 0,01\%$ ($0,1\text{mm/m}$)
Frost resistance	ISO 10545-12	Test passed in accordance with ISO 10545-1	Resistant

Physical Characteristics

Technical features	Norms	Required Standard	Performance Value
Bond strength/adhesion for improved cementitious adhesives	EN 1348	Declared value	$\geq 1,0\text{ N/mm}^2$ (Class C2 - EN 12004)
Reaction to fire	-	Class A1 or A1 _{fl}	A1 - A1 _{fl}

Chemical Characteristics

Technical features	Norms	Required Standard	Performance Value
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Minimum B class	A
Resistance to low concentrations of acids and alkalis		Declared class	LA
Resistance to high concentrations of acids and alkalis		Declared class	HA

Resistance to staining, for unglazed tiles	ISO 10545-14	Declared class	5
--	--------------	----------------	---

Safety Characteristics

Technical features	Norms	Required Standard	Performance Value
Shod Ramp Test	DIN EN 16165 ANNEX B (EX DIN 51130)	Declared value	R11
Barefoot Ramp test	DIN EN 16165 ANNEX A (EX DIN 51097)	Declared value	A+B+C
Pendulum friction Test	BS EN 16165 ANNEX C (EX BS 7976)	PTV ≥ 36 classifies the surface as "low slip risk"	≥ 36 Dry ≥ 36 Wet
	AS 4586	Declared Classification of the pedestrian surface	Class P4
	UNE 41901 EX:2017	Declared value	Class C3
Coefficient of friction (COF)	B.C.R.A. Rep. CEC/81	- Min. Dec. 236/89 of 14/06/89 - $\mu > 0.40$ for a sliding leather element on a dry floor - $\mu > 0.40$ for a sliding hard rubber element on a wet floor	> 0.40 Dry (Asciutto) > 0.40 Wet (Bagnato)
Dynamic coefficient of friction (DCOF)	ANSI A 326,3		> 0.55 Wet

Physical-mechanical features in accordance with EN 1339

Technical features	EN 1339 standard	Performance Value
Water absorption	Annex E	$< 0,1\%$
Bending strength / Breaking load	Annex F	Marking \geq T11 60x60 Marking \geq U4 60x120 Marking \geq T11 120x120
Frost resistant in the presence of defrosting salts	Annex D	Resistant

(•) Anti-slip performance is guaranteed at the time of delivery of the product.

(*) The permissible deviation, in % or mm, of the average size for each tile (2 or 4 sides) from work size (W).

(**) The permissible deviation, in % or mm, of the average thickness for each tile from the work size thickness (W).

(***) The maximum permissible deviation from straightness, in % or mm, related to the corresponding work sizes (W).

(****) The maximum permissible deviation from rectangularity, in % or mm, related to the corresponding work sizes (W).

c.c. The maximum permissible deviation from centre curvature, in % or mm, related to the diagonal calculated from the work sizes (W).

e.c. The maximum permissible deviation from edge curvature, in % or mm, related to the corresponding work sizes (W).

w. The maximum permissible deviation from warpage, in % or mm, related to the diagonal calculated from the work sizes (W).

Compatible Systems




BalcaSmart®
Pedestal Paving System

Straightforward, robust paving system for metal-frame balconies



BalcaSmart®
Rail Paving System

Premium, versatile paving system for waterproofed substrates

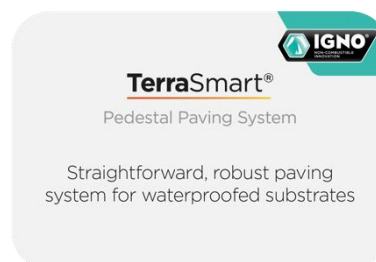

TerraSmart®
Pedestal Paving System

Straightforward, robust paving system for waterproofed substrates



TerraSmart®
Rail Paving System

Premium, versatile paving system for waterproofed substrates



TerraSmart®
Pedestal Paving System

Straightforward, robust paving system for waterproofed substrates, **where non-combustibility isn't required**



TerraSmart®
Rail Paving System

Premium, versatile paving system for waterproofed substrates, **where non-combustibility isn't required**

Got Questions?

Visit www.rynogroup.co.uk or call us today on **+44 (0)203 967 3500** or reach out on sales@rynogroup.co.uk.